
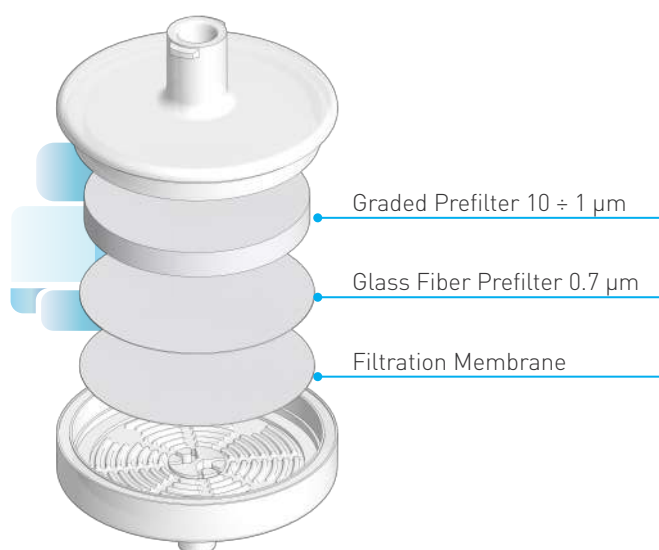


Sample Preparation

Abluo Supreme

ABLUO
SUPREME

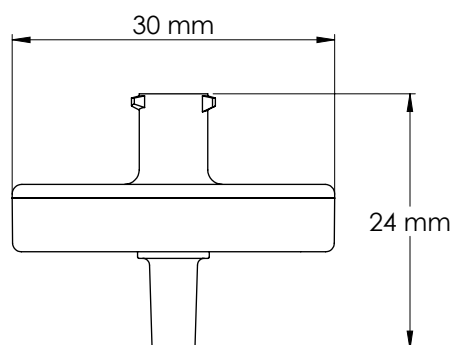

Characteristics

Membrane Diameter: 25 mm

Effective Filtration Area: 4.63 cm²

Housing Diameter: 30 mm

Housing Materials: Clear Polypropylene

Maximum Operating Temperature: 90°C / 194°F

Maximum Operating Pressure: 75 psi

Shelf Life (normal conditions): 3 years

Ordering information

Membrane	Pore Size(µm)	Description	Product Code
NY	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - NY 0.2 µm	GF25BNPGN002AD01
NY	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - NY 0.45 µm	GF25BNPGN004AD01
PES	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PES 0.2 µm	GF25BNPGS002AD01
PES	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PES 0.45 µm	GF25BNPGS004AD01
PTFE	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PTFE 0.2 µm	GF25BNPGT002AD01
PTFE	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PTFE 0.45 µm	GF25BNPGT004AD01
PTFE (Hydrophilic)	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PTFE Hydrophilic 0.2 µm	GF25BNPGH002AD01
PTFE (Hydrophilic)	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PTFE Hydrophilic 0.45 µm	GF25BNPGH004AD01
PVDF	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PVDF 0.2 µm	GF25BNPGV002AD01
PVDF	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - PVDF 0.45 µm	GF25BNPGV004AD01
CA	0.2	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - CA 0.2 µm	GF25BNPGA002AD01
CA	0.45	ABLUO SUPREME Syringe Filter 25 mm, FLL/MLS - CA 0.45 µm	GF25BNPGA004AD01
RC	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.22UM CLR 10/PK	GF25BNPGR002AT01
RC	0.2	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.22UM CLR 50/PK	GF25BNPGR002AL01
RC	0.22	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.22UM CLR 500/PK	GF25BNPGR002AD01
RC	0.45	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.45UM CLR 10/PK	GF25BNPGR004AT01
RC	0.45	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.45UM CLR 50/PK	GF25BNPGR004AL01
RC	0.45	ABLUO SUPREME Syringe Filter 25mm, FLL/MLS - PP GF/F/RC 0.7/0.45UM CLR 500/PK	GF25BNPGR004AD01